



iDROPSTM
PCDS

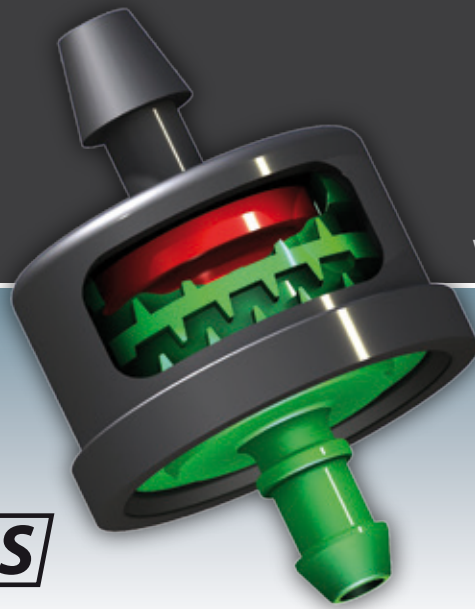

**Pressure Compensating
Drip Emitters with CNL Feature**

Features:

- CNL Feature Prevents Refill and Siphoning (Opens at 5.7 Psi, Closes at 4.3 Psi)
- Superior Clog Resistance
- Fully Pressure Compensating (10-65 Psi)
- Five Flow Rates to Fit Most Applications
- Silicone Diaphragm Offers Precision and Long Life
- Large Turbulent Flow Path
- Made With UV Resistant Materials
- Color Coded for Ease of Identification
- Compact Size
- Low CV's of 2.5% or Less
- Versatile Applications: Nursery, Greenhouse, Vineyard and Landscape
- Non-CNL Version Also Available

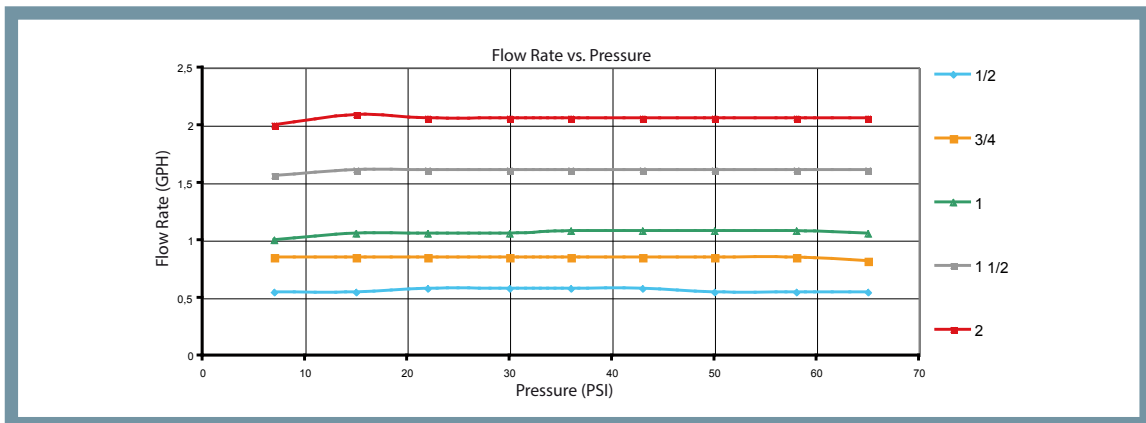

Flow Rate	Pressure (PSI)									
	7	15	22	30	36	43	50	58	65	
1/2 gph	.55	.55	.58	.58	.58	.58	.55	.55	.55	
3/4 gph	.85	.85	.85	.85	.85	.85	.85	.85	.82	
1 gph	1.00	1.06	1.06	1.06	1.08	1.08	1.08	1.08	1.06	
1.5 gph	1.56	1.61	1.61	1.61	1.61	1.61	1.61	1.61	1.61	
2 gph	2.00	2.09	2.06	2.06	2.06	2.06	2.06	2.06	2.06	

Dripper Manifold Flow Chart

Dripper Flow Rate (GPH)	Manifold Split	Flow rate per Stake (GPH)
.58 blue	4	.13
.85 brown	4	.19
1.06 green	4	.26
.58 blue	2	.26
1.59 gray	4	.40
.85 brown	2	.40
2.06 red	4	.45
1.06 green	2	.53

Dripper with Manifold Combination (2 Way and 4 Way)




Notes:

- Recommended height difference between stake not to exceed 4"
- Recommended micro-tube length not to exceed 32"
- ASD/AID stakes require micro-tube Size .125"x.187" PE or PVC.



NORMAL

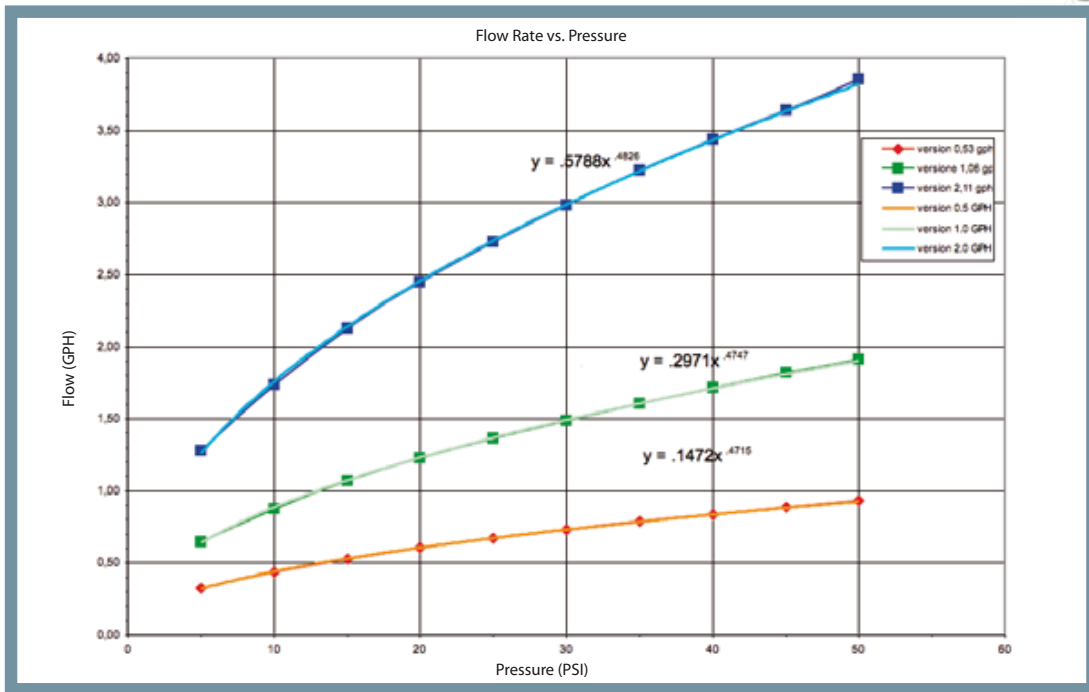

NORMAL Flow Rate

Nominal Flow	True Flow (GPH)	Pressure (PSI)									
		5	10	15	20	25	30	35	40	45	50
.5 (gph)	.53	.32	.44	.53	.60	.67	.73	.79	.84	.89	.93
1.0 (gph)	1.05	.65	.88	1.07	1.22	1.36	1.49	1.61	1.72	1.82	1.91
2.0 (gph)	2.11	1.28	1.73	2.13	2.45	2.73	2.98	3.22	3.44	3.64	3.86

Irritec USA Inc.

1420 Irritec Way - Fresno, CA 93703

Tel: (559) 275-8825 - Fax: (559) 275-9555 - Toll Free: (877) 298-2075

www.irritecusa.com

don't wait for rain™